


Downlights

GAT WALL WASH

INTERIOR DOWNLIGHTS
ASYMMETRIC - WALLWASHER


Ceiling recessed LED downlights with asymmetrical wallwasher light distribution. Wallwasher is the best solution to increase vertical illuminance levels creating a more bright and pleasant ambience. Square / Round frame.

Body: BRASS
Frame: BRASS
Protective glass: CLEAR GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. 

HIGH POWER WALL WASH

GAT Q / WW Ø 100 - 12 W

DRIVER TENSION: 110 - 220 
Vf 34 If 350 mA




Downlights

GAT

INTERIOR DOWNLIGHTS
HIGH POWER


Ceiling recessed LED downlights, with symmetrical light distribution. Square / Round frame.


Body: BRASS
Frame: BRASS
Protective glass: CLEAR GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. 

HIGH POWER


GAT Q Ø 100 - 12 W

DRIVER TENSION: 110 - 220 
Vf 34 If 350 mA

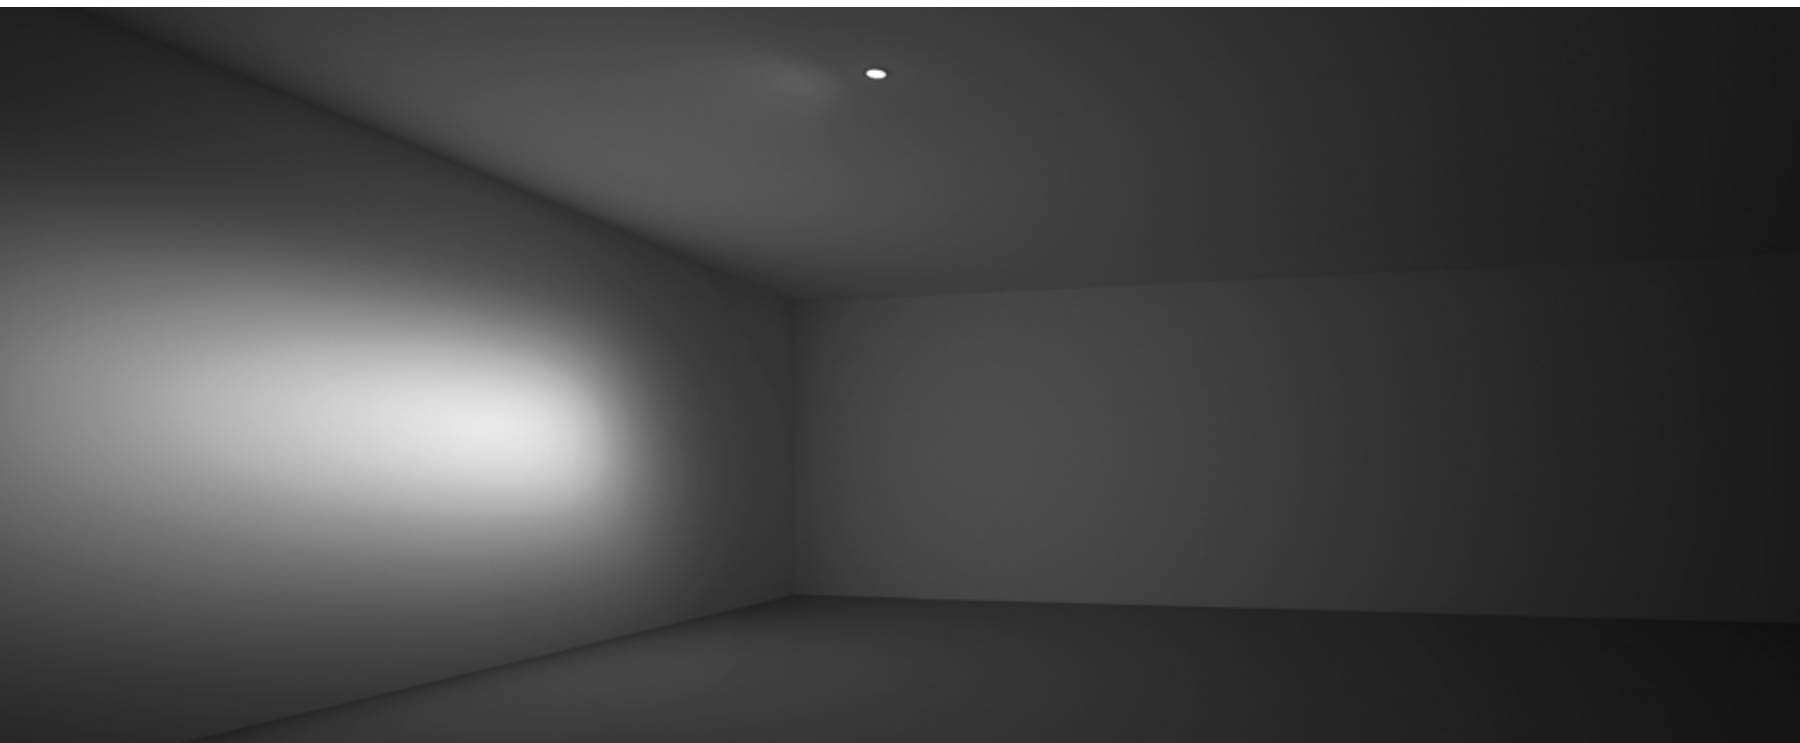

HIGH POWER WALL WASH


GAT / WW Ø 100 - 12 W

DRIVER TENSION: 110 - 220 
Vf 34 If 350 mA



HIGH POWER

GAT Ø 100 - 12 W




DRIVER TENSION: 110 - 220 
Vf 34 If 350 mA





ROSS DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20ROSS01 730 84 53° 80


VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: D (24 v DC - CLL) | Code: 3 (3000 Kelvin)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT / WW DOWNLIGHT - 12W - Vf 34 If 350 mA



MODEL SPECIFICS:

MODEL CODE:
20GATWW01


VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT Q / WW DOWNLIGHT - 12W - Vf 34 If 350 mA



MODEL SPECIFICS:

MODEL CODE:
20GATQWW01

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT DOWNLIGHT - 12W - Vf 34 v DC If 350 mA

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20GAT01 927 73 46° 80

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT Q DOWNLIGHT - 12W - Vf 34 v DC If 350 mA

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20GATQ01 927 73 46° 80

VARIABLE PRODUCT CODES:





POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



OCEAN / FLAT DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20OCEANF01 579 65 78° 80

VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v DC - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

